

TEST REPORT

Mechanical & Hardgoods Laboratory

Report No. : TH30189/2017

Page : 1 OF 4

Date : MAR. 17, 2017

SR SUNTOUR INC.

No.7, Singye Rd., Fusing Township, Changhua County 506, Taiwan (R.O.C.)

The following merchandise was submitted and identified by the applicant as:

Product Description: SEAT POST
Style/Item No.: SP12 NCX31.6*400
Sample Quantity: 1 pc of seatpost

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Requested: For compliance with Clause 4.16.6.1.2 and Clause 4.16.6.2.2 of ISO 4210-2:2015 Cycles — Safety requirements for bicycles — Part 2: Requirements for city and trekking, young adult, mountain and racing bicycles.

Test Method: According to Clause 4.5.2 and Clause 4.5.3 of ISO 4210-9:2014 Cycles — Safety requirements for bicycles — Part 9: Saddles and seat-post test methods.

Sequence of Testing: Clause 4.5.2, Clause 4.5.3 of ISO 4210-9

Bicycle type: ☐ City and trekking ☐ Young adult ☒ Mountain ☐ Racing

Test Result: --See following sheet(s)--

Date of Receipt: MAR. 10, 2017

Testing Period: MAR. 15, 2017 ~ MAR. 17, 2017

--- See Next Page ---

Signed for and on behalf of
SGS Taiwan Ltd.

Kaini Chen
Team Leader



Testing Place: No. 9, 14th Rd., Taichung Ind. Park, Taichung City 40755, Taiwan

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

TEST REPORT

Mechanical & Hardgoods Laboratory

Report No. : TH30189/2017

Page : 2 OF 4

Test Result:

Bicycle type: ☐ City and trekking ☐ Young adult ☒ Mountain ☐ Racing

Clauses:

4.16.6 (ISO 4210-2) Seat-post — Fatigue test


4.16.6.1 (ISO 4210-2) Requirement for stage 1

4.16.6.1.2 (ISO 4210-2) Seat-post with suspension system

When tested by the method described in ISO 4210-9:2014, 4.5.2, there shall be no visible cracks or fractures in the seat-post, or any bolt failure. The design shall be such that in the event of failure of the suspension system, the two main parts do not separate, nor does the upper part (i.e. the part to which the saddle would be attached) become free to swivel in the lower part.

4.5.2 (ISO 4210-9) Test method for stage 1 (fatigue test)

Figure:

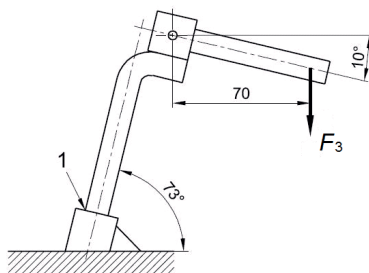

Actual Finding:

Test clause	Test conditions			Test Result (Cycles)
	Force	Frequency	Cycles	
Clause 4.5.2 (ISO 4210-9)	1,200 N(F ₃)	2 Hz	100,000	100,000
Remark	There was no visible crack on the sample after testing.			

- Note:**
1. Information of Sample: The weight of seatpost is 859 g.
 2. The tightening torque of the screw on clamp is 30 Nm.
 3. The minimum insertion depth is 65 mm.
 4. Diameter of seat-pillar is 31.6 mm.
 5. The tightening torque of the screw on fixture is 6 Nm.

--- See Next Page ---

TEST REPORT

Mechanical & Hardgoods Laboratory

Report No. : TH30189/2017

Page : 3 OF 4

Test Result:

Bicycle type: ☐ City and trekking ☐ Young adult ☒ Mountain ☐ Racing

Clauses:

4.16.6 (ISO 4210-2) Seat-post — Fatigue test

4.16.6.2 (ISO 4210-2) Requirement for stage 2

4.16.6.2.2 (ISO 4210-2) Seat-post with suspension system


When tested by the method described in ISO 4210-9:2014, 4.5.3, there shall be no fractures. The design shall be such that in the event of failure of the suspension system, the two main parts do not separate, nor does the upper part (i.e. the part to which the saddle would be attached) become free to swivel in the lower part.

Result

Pass

4.5.3 (ISO 4210-9) Test method for stage 2 (static strength test)

Figure:

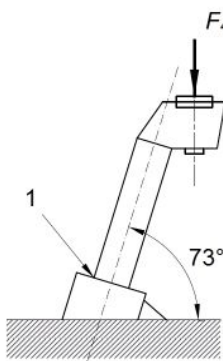

Actual Finding:

Test clause	Test Force	Test Result
Clause 4.5.3 (ISO 4210-9)	2,000 N(F ₄)	There was no visible crack on the sample after testing.

- Note:**
1. Information of Sample: The weight of seatpost is 859 g.
 2. The tightening torque of the screw on clamp is 30 Nm.
 3. The minimum insertion depth is 65 mm.
 4. Diameter of seat-pillar is 31.6 mm.
 5. The tightening torque of the screw on fixture is 6 Nm.

--- See Next Page ---

TEST REPORT

Mechanical & Hardgoods Laboratory

Report No. : TH30189/2017

Page : 4 OF 4

– Picture(s) –



Photo "A" Appearance of sample



Photo "B" Appearance of sample



Photo "C" Appearance of sample

-- Blank --

-- Blank --

--- End of Report ---